



»SENSOR DE MASAS LOOP DETECTOR PARA APLICACION INDUSTRIAL  
MARCA HOTRON MOD.ULD 913 MOD.ULD 920.




# MANUAL DE INSTALACION




# INDEX

	<u>PAGE</u>
Detector Commissioning .....	1
Frequency .....	1
Sensitivity .....	1
Automatic Sensitivity Boost (ASB) .....	2
Presence .....	2
Internal Links .....	2
Indications .....	3
Reset Push Button .....	3
Pinouts .....	4
Loop installations .....	5
Cable Specification .....	5
Loop Geometry .....	5
Slot Depth .....	5
Determining Number of Turns of Cable .....	5
Detector Direction Logic Operation .....	6
Technical Specifications .....	8

# DETECTOR COMMISSIONING

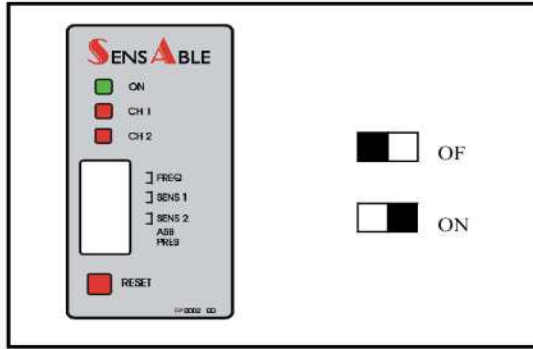

## FREQUENCY (SWITCHES 1 & 2)

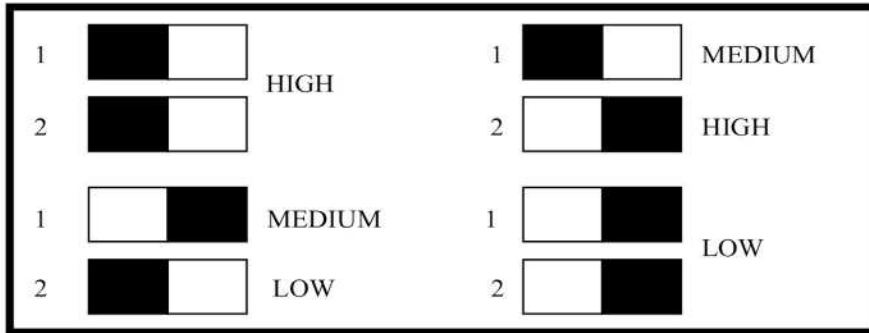


Frequency setting is provided to eliminate crosstalk (interface) between adjacent detectors. Crosstalk is indicated by random outputs, chattering relays and possible detector lock-up.

## SENSITIVITY

Channel 1 - switches 3 & 4

Channel 2 - switches 5 & 6

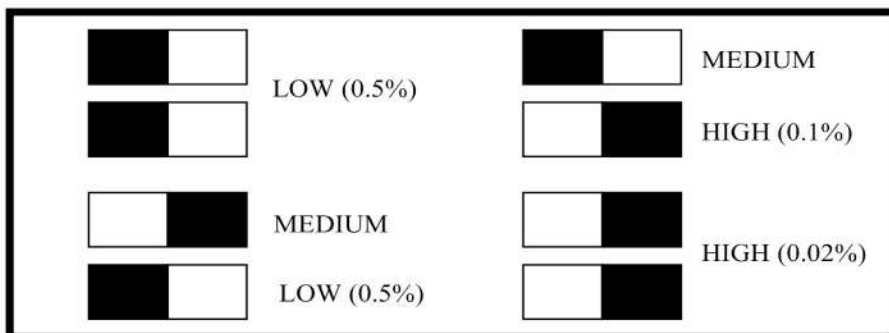

Sensitivity settings have been optimised to reliably produce an output at the required change on inductance, or to ignore certain vehicle types if so required.  
 Typical inductance changes on a 2m x 1m (3 turns) loop:-

VEHICLE	$\Delta L/L$
BICYCLE	0.02 %
MOTORCYCLE	0.12 %
ARTICULATED TRUCK	0.4 %
SEDAN CAR	>1.0 %

**AUTOMATIC SENSITIVITY BOOST (ASB) (SWITCH 7)**

When ASB is selected (ON) the level of sensitivity is increased to HIGH after detection has occurred. This ensures that Detection does not drop away under high-bed vehicles.

**PRESENCE (PRES) (SWITCH 8)**

- ON - PERMANENT PRESENCE
- OFF - LIMITED PRESENCE (1 hr for 3 %  $\Delta L/L$ )


**INTERNAL LINKS**

**AB LOGIC**

- No AB Logic . . .
- AB Presence . . .
- AB Pulse . . .

**PULSE / PRESENCE**

- PP 1 – channel 1
- PP 2 – channel 2
- Presence .
- Pulse .

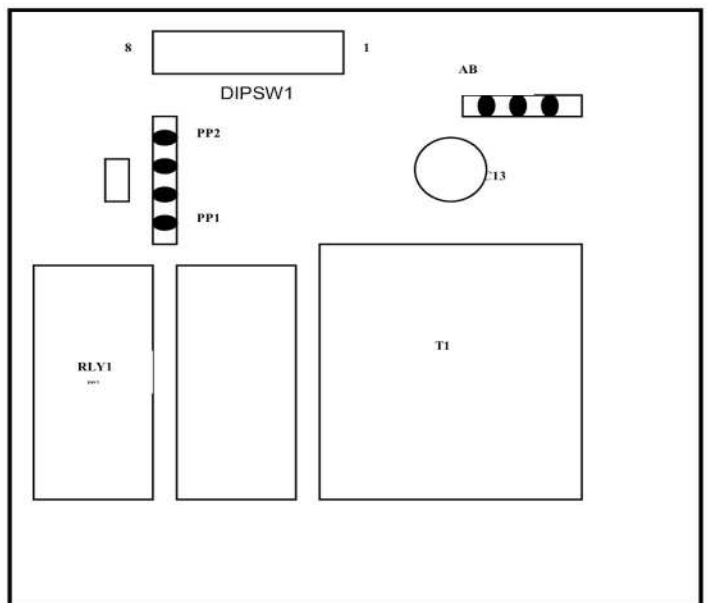

## INDICATIONS

- GREEN LED - POWER ON
- RED LED - CHANNEL OUTPUT

After initial power-up or after a re-tune, the detector automatically tunes to the inductive loop. After 0.2 seconds the **RED LED** will flash out the frequency of operation (50 kHz = 5 flashes)


If a fault condition exists on the loop (open circuit / short circuit) the **RED LED** will **FLASH** at a fast rate. If a re-tune occurs the **RED LED** will **FLASH**, but at a slower rate.

## RESET PUSH BUTTON

The Detector must be **RESET** whenever switch settings are altered.

Only a reset will clear the above fault indication conditions, providing the loop fault has been cleared.

## PINOUTS

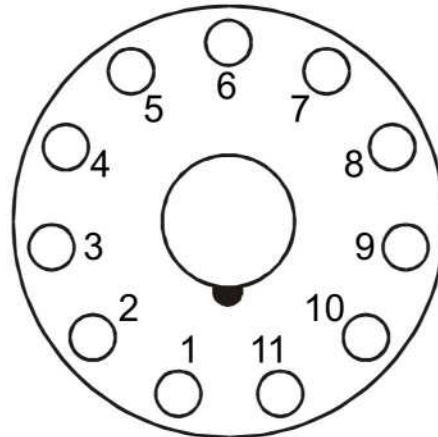

PIN	DESCRIPTION
1	LIVE (DC+)
2	NEUTRAL (0V)
3	LOOP CHANNEL 1
4	LOOP CHANNEL 1
5	LOOP CHANNEL 2
6	LOOP CHANNEL 2
7	CHANNEL 2 N / O
8	CHANNEL 2 COMMON
9	EARTH
10	CHANNEL 1 N/O
11	CHANNEL 1 COMMON

# LOOP INSTALLATIONS

## CABLE SPECIFICATION (LOOP + FEEDER)

1.5mm<sup>2</sup> cross sectional area, multi-strand cable.

Insulation material – PVC or Silicone.

Current Rating – 15A.


## FEEDER FOR LONG RUNS

Foil screened cable recommended (Earth at equipment end only)

Waterproof cable junction box (Pratley or similar) will be required.

Loop feeder cables should always be twisted from the point of exiting the loop, to the termination of cables on the equipment. Minimum of 20 twists per metre should be used.

## LOOP GEOMETRY

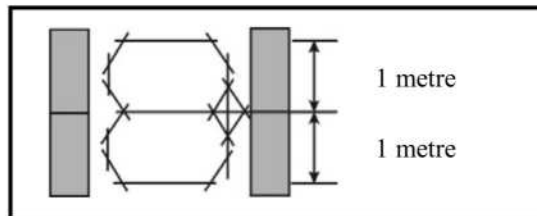


**\*\*NOTE:-** That with two adjacent loops connected to a dual channel detector, it is possible for these loops to share a common slot, if so required.

As the channels are multi-plexed, no crosstalk (interference) will occur.

**\*\*NOTE:-** Avoid large loops, sensitivity will be affected

## SLOT DEPTH

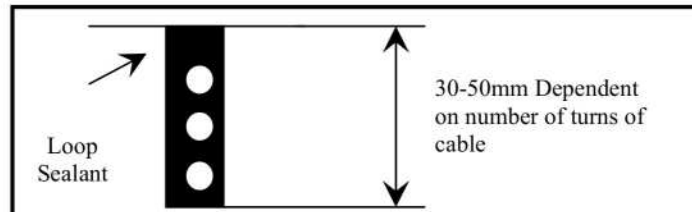

**\*\*NOTE:-** Clean & dry slots prior to inserting cable.

## DETERMINING NUMBER OF TURNS OF CABLE

PERIMETER	NO. OF TURNS
3 – 6 M	4
6 – 10 M	3
10 – 30 M	2



**\*\*NOTE:-** Add 2 additional turns to compensate for the effects of sub-surface re-inforcing on sensitivity.

# DETECTOR DIRECTION LOGIC OPERATION


## PULSE MODE

3 feet max / 1M


< >

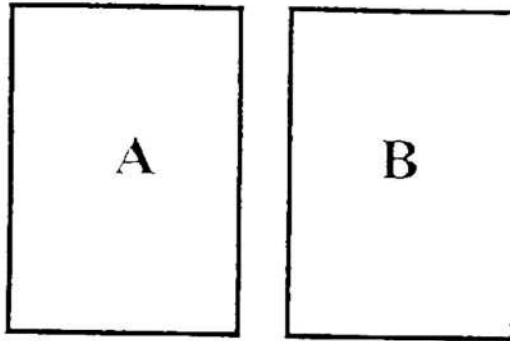

No output



No output





**Pulse output**  
A > B – CH1  
B > A – CH2



PRESENCE MODE

3 feet max / 1M  
< >

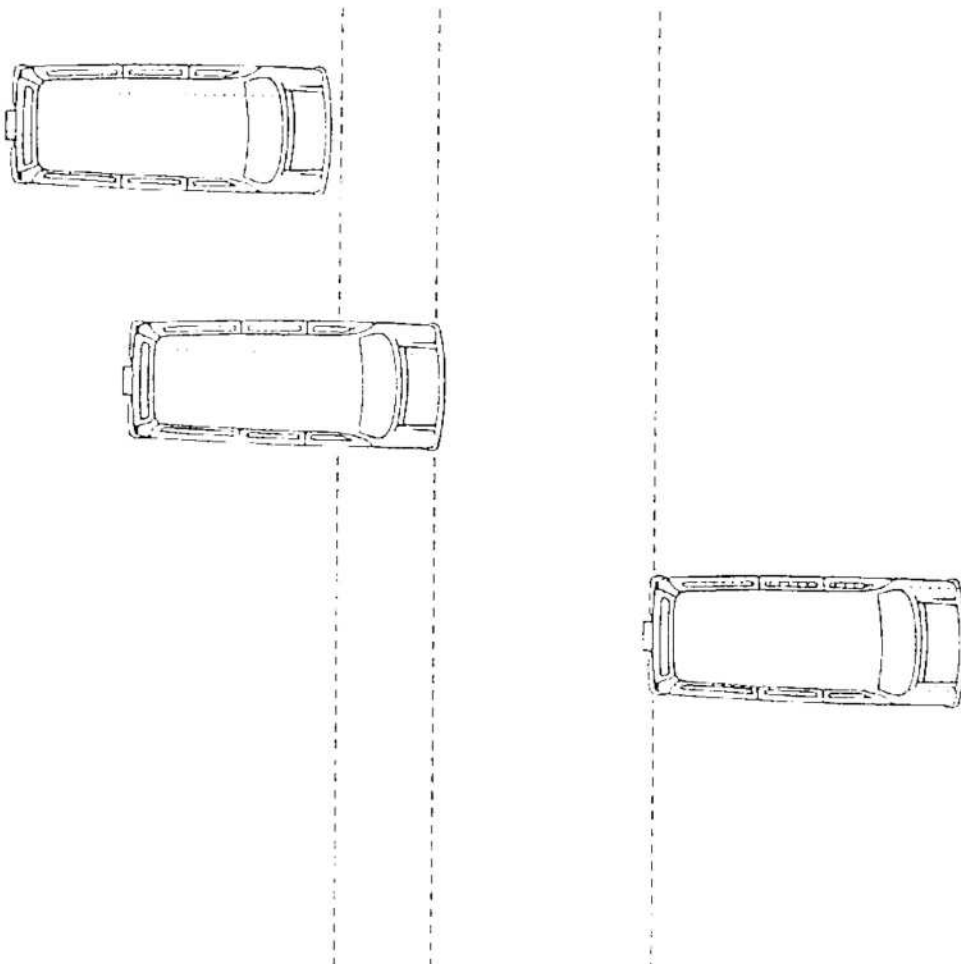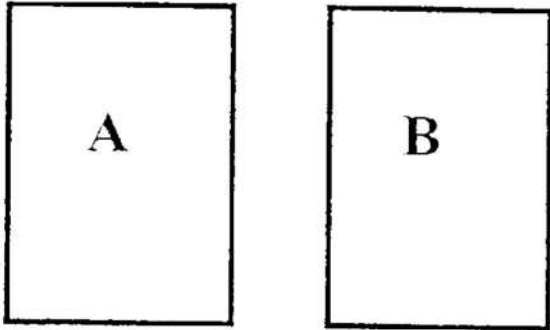


No output

Presence output begins

Presence output ends  
A > B – CH1  
B > A – CH2

Power	ULD 921	230V AC ±15
	ULD 922	115V AC ±15
	ULD 923	12/24V AC/DC ±15
Relay Rating	5A @ 230V AC	
Temperature range	-40°C to +80°C	
Storage Temperature	-40°C to +85°C	
Humidity	Up to 95% RH	
Dimensions	75mm x 40mm x 76mm (H x W x D)	

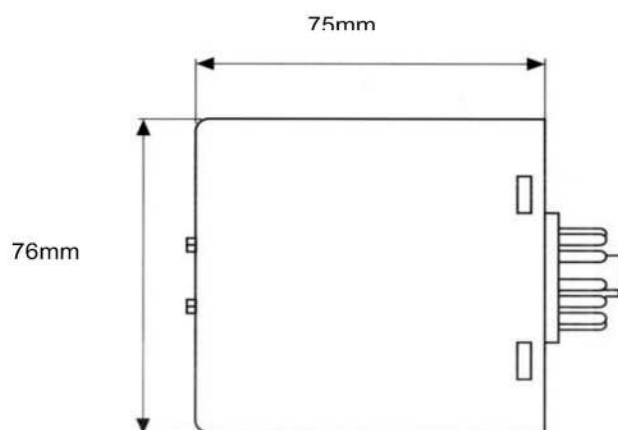

**HOTRON**



Puertas & Portones Automáticos, S.A. de C.V.

*¡Nuestra pasión es la Solución!....*

»SENSOR DE MASAS LOOP DETECTOR PARA APLICACION INDUSTRIAL  
MARCA HOTRON MOD.ULD 913 MOD.ULD 920.



Puertas & Portones Automáticos, S.A. de C.V.

*¡Nuestra pasión es la Solución!....*

(229) 288-1552

portonesautomaticos@adsver.com.mx  
portonesautomaticos@prodigy.net.mx



RESIDENCIAL



COMERCIAL



INDUSTRIAL



V11.19

(229) 927-5107, 167-8080, 167-8007, 151-7529.



[www.adsver.com.mx](http://www.adsver.com.mx)