

FALCON



ADS

AUTOMATIC
DOOR
SPECIALIST

Puertas & Portones Automaticos, S.A. de C.V.

¡Nuestra pasión es la Solución!....


»BARRA DE PANICO VERTICAL MOD.F-19-V

F-19-V Series non-handed vertical rod device

Fire exit hardware

Manufactured to the same standards as the F-19 Rim, the F-19-V Fire exit device complies with most exit door requirements, and is fully reversible and surface applied. This device is regularly furnished with deadlocking top latch retention and square bolt at bottom. (This device is listed by UL for "B" label fire door installations.) The "EO" (exit only) device is ready to accept any trim function shown on page 17.

3788
Strike

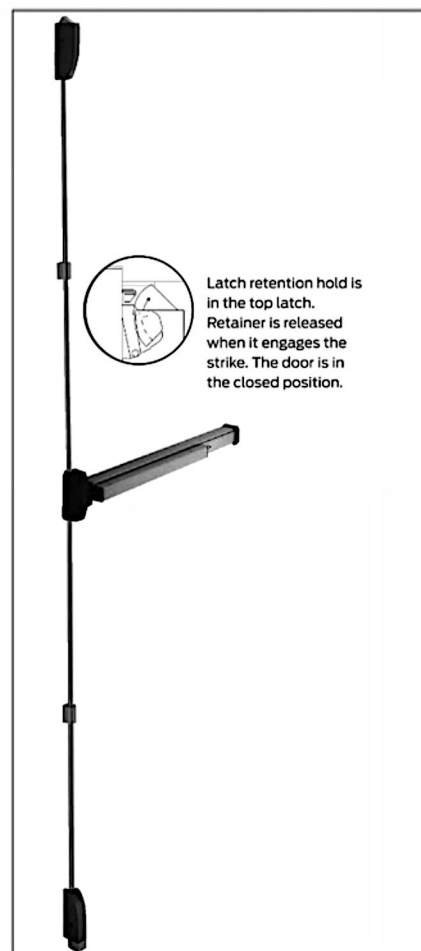

Latch retention hold is in the top latch. Retainer is released when it engages the strike. The door is in the closed position.

2130
Strike

DEVICE & TRIM	ANSI TYPE	ANSI FUNCTION
F-19-V-EO	2 OR 5	01
CÓDIGO	DESCRIPCIÓN	
AG-00308-00	BARRA DE PANICO VERTICAL 3"	
AG-00309-00	BARRA DE PANICO VERTICAL 4"	
AG-00320-00	TRIM PARA BARRA DE PANICO MOD.912LDAN	

Specifications


Hand:	Field reversible.
Functions:	All functions built into "EO" device. All 19 Series trim works with rim or vertical devices. See Trim Selection Chart on pages 15 and 16.
Finishes:	Powder-coated aluminum-SP28; powder-coated duranodic-SP313; stainless steel US-32D.
Strikes:	3788 strike is surface applied. 2130 strike is mortised into floor.
Latchbolt:	Top stainless steel 1/4" throw. Bottom square bolt 1/2" throw.
Deadlocking latchbolt:	Standard.
Stock sizes:	3' for doors from 2'5" up to 3'. 4' for doors from 3' up to 4'.
Doors:	1 3/4" thick, wood or metal. Specify if other than 1 3/4" thick.
Projection:	2 1/2" maximum.
Fasteners:	All mounting screws are concealed. All machine screws standard.
Sex bolts:	3-#4122 (1/4"-20) SNB standard. Composite or non-reinforced wood, hollow metal require additional sex bolts. F-19-V: 6-#2729 #10-24 SNB; F-19-V-LBR: 3-#2729 #10-24 SNB.
ANSI:	Certified ANSI A156.3-2001 grade 1 standards.
F-19-V:	Latch retention and 3788 strike top deadbolt and 2130 flush strike bottom.
F-19-V-LBR:	Latch retention and 3788 strike top.
Vertical rods:	Furnished to length based on a 40 1/4" horizontal CL from finished floor and a 7'0" door standard. Variations from these standards must be specified when ordering.
Shim kit:	For glass lites applications; 1/4" thick specify SK-19-V-1/4".
161 cutout:	Device covers 161 cutout with KIK/KIL and Centron trims. Other trim requires cover plate.

US LISTED
FIRE EXIT HARDWARE
ISSUE NO.
Conforms with standards
UL10C and USC 7-2 (1997)

MONARCH SHEPHERDVILLE, KY



● TRIM PARA BARRA DE PANICO MOD.912LDAN



Lever Projection: Quantum = 3"
Sutro = 2 7/8"
Dane = 2 7/8"
Avalon = 3"

(229) 461-7028

portonesautomaticos@adsver.com.mx
portonesautomaticos@prodigy.net.mx



V03.24



www.adsver.com.mx

(229) 927-55107, 167-8080, 167-8007, 151-7529