ALLEGION™

A·D·S AUTOMATIC DOOR SPECIALIST

Puertas & Portones Automaticos, S.A. de C.V.

¡Nuestra pasión es la Solución!....

»CIERRAPUERTAS HIDRAULICO GRADO 1 SERIE.4041

4041 Super Smoothie® Adjustable Closer

Parallel Arm Mount Shown

UL LISTED

- The 4041 SUPER SMOOTHIE® is a heavy duty, double lever arm closer for institutional and other high traffic applications.
- Adjustable from size 1 to 6 for interior doors up to 5'0" and exterior doors up to 4'0" using the Fast™ Power Adjust feature.
- Closer mounts hinge side, top jamb, and parallel arm.
- Cast iron cylinder
- Non-Handed
- Meet handicap standards for reduced opening force.
- ANSI standard A156.4, Grade 1
- Peel and stick template
- UL & cUL Listed (without hold open arm)
- Capable of ten million cycles.
- Forged steel arm
- Double heat treated steel pinion.
- All weather fluid
- Powder Coat Finish

Delayed Action

- Delays closing from 120° to 70°. Delay time adjustable up to approximately 1 minute.

Mfg #	Closing Type	Finish	Arm Type	EZ #
P4040ALUM W/TB	Regular	Aluminum	Standard	008562
P4041KPD DK W/TB	Regular	Dark Bronze	Standard	008555
4041CUSH AL TBSRT	Regular	Aluminum	Cush	027713
4041SCUSH689	Regular	Aluminum	Spring Cush	080385
4041EDA AL TBSRT	Regular	Aluminum	Extra Duty	077246
4040 AL H90	Regular	Aluminum	Hold Open	035865
P4041H CUSH ALUM	Regular	Aluminum	Hold Open Cush	029331
P4041HO AL SCUSH	Regular	Aluminum	Hold Open Spring Cush	073039
4041REG AL DEL TBSRT	Delayed Action	Aluminum	Standard	029589

Closer Arms & Parts			
Mfg #	Description	Length	EZ #
4040 3049AL	Hold Open Arm		008566
4040 3077AL	Regular Arm		008563
4040 79 689	Rod & Shoe for Regular Arm	6 3/8"	074875
4040 79LR	Long Rod & Shoe for Regular Arm	8 3/8	074876

Arm Options

Standard Arm
Non-handed arm mounts pull side or top jamb with shallow reveal. P4041 closer includes PA shoe,

Cush Arm
- Optional, non-handed parallel arm features solid forged steel main arm and forearm with stop in soffit shoe.

Spring Cush Arm
- Optional, non-handed parallel arm for abusive applications features solid forged steel main arm and forearm with spring loaded stop in the soffit shoe.

EDA (Extra Duty) Arm
Non-handed parallel arm features forged, solid steel main and forearm for potentially abusive installations.

Hold Open Arm
Optional, non-handed arm mounts pull side or top jamb with shallow reveal, hold-open adjustable shoe.

Cush Hold Open
Provides hold-open function with templated stop/hold-open points. Handle controls hold-open function.

Spring Cush Hold Open
Optional, non-handed parallel arm for abusive applications features solid forged steel main arm and forearm with spring loaded stop in the soffit shoe. Handle controls hold-open function.

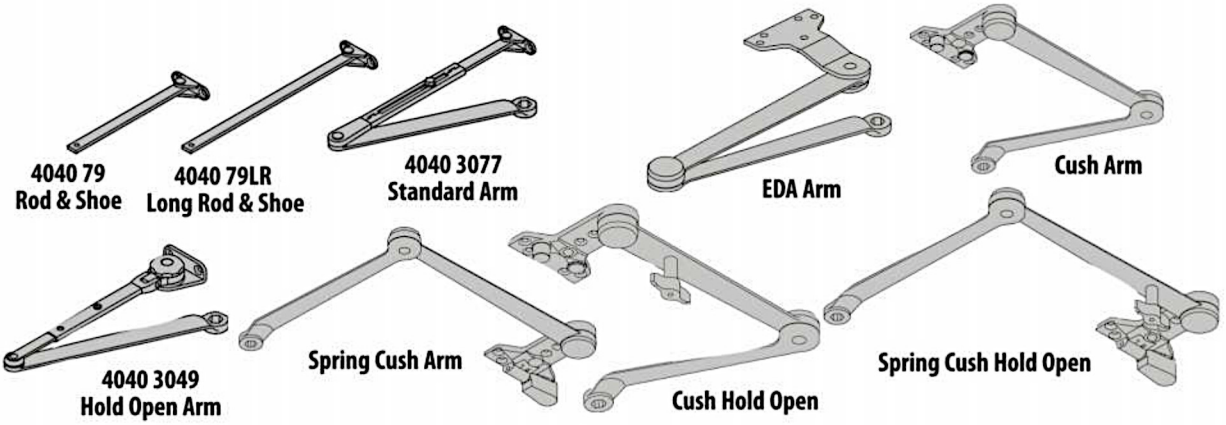

V04.24

(229) 461-7028
portonesautomaticos@adsver.com.mx
portonesautomaticos@prodigy.net.mx

RESIDENCIAL COMERCIAL INDUSTRIAL

MEMBER IDA International Door Association