



» OPERADOR ABATIBLE MARCA CAME MOD.ATS.

ATS


SWING GATE AUTOMATION



MAXIMUM LEAF LENGTH	MAXIMUM LEAF WEIGHT	DUTY CYCLE	C MAX.
UP TO 5 m	UP TO 800 kg	CONTINUOUS OPERATION	200 mm




Dimensions (mm)

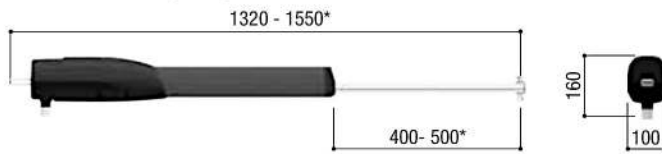

Solution for residential settings and apartment blocks, on posts with C Max. up to 200 mm

- Designed for applications with C Max. up to 200 mm.
- Sturdy and durable with die-cast aluminium supporting structure.
- Reducer with bevel gear for greater fluidity of movement.
- Release system, with the possibility of remote control.
- Developed with CONNECT technology for remote digital control via gateway or locally via CAME KEY.

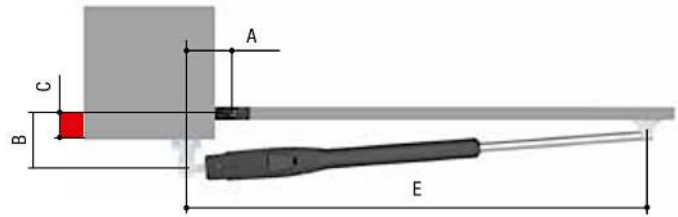

Operational limits

MODELS	801MP-0050	801MP-0070	801MP-0090	801MP-0110
Max. length of leaf (m)	3	2,5	2	
Max. weight of leaf (kg)	400	600	800	
Max. leaf opening (°)	120			

MODELS	801MP-0060	801MP-0080	801MP-0100		
Max. length of leaf (m)	5	4	3	2,5	2
Max. weight of leaf (kg)	400	500	600	800	1000
Max. leaf opening (°)	120				

Application dimensions (mm)

ARTICULATED ARM	801MP-0050	801MP-0070	801MP-0090	801MP-0110
LEAF OPENING (°)	A	B	C Max.	
90	130	130	50	
90	150	220	150	
90	120	270	200	
120	180	130	50	

ARTICULATED ARM	801MP-0060	801MP-0080	801MP-0100	
LEAF OPENING (°)	A	B	C Max.	
90	200	200	150	
90	200	270	200	
120	200	140	70	

Technical characteristics

MODELS	801MP-0050	801MP-0060	801MP-0090	801MP-0100	801MP-0070	801MP-0080	801MP-0110
Protection rating (IP)	54	54	54	54	54	54	54
Power supply to motor (V)	230 AC	230 AC	230 AC	230 AC	24 DC	24 DC	24 DC
Absorption (A)	1	1	1	1	8 MAX	8 MAX	8 MAX
Power (W)	250	250	250	250	80	80	80
Maneuvering time at 90° (s)	15	20	15	20	15 ÷ 30	15 ÷ 30	15 ÷ 30
Cycles/Hour	20	20	20	20	CONTINUOUS SERVICE	CONTINUOUS SERVICE	CONTINUOUS SERVICE
Thrust (N)	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55
Motor's heat protection (°C)	150	150	150	150	-	-	-

● 230 V AC ● 24 V DC

