


» OPERADOR LATERAL PARA CORTINA ENROLLABLE SIN RESORTES USO INTENSIVO RAPIDO HASTA 600 KILOS MARCA ELSAMEC MOD.TAURUS FAST 8M.



● MOD.TAURUS FAST 8M  
(EA-00007-00) + (EA-00061-00)



(EA-00007-00)

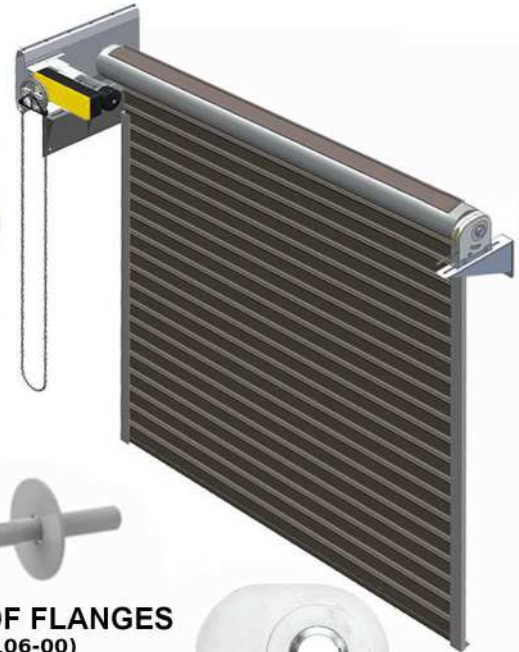

● MOD.AXLE  
(EA-00066-00)



● MOD.PAIR OF FLANGES  
(SI-00106-00)



● MOD.SAL-B339  
(JT-00151-00)



● MOD.MOTOR BRACKET  
(EA-00061-00)



● MOD.STOP RING  
(EA-00069-00)



● MOD.PRB 40  
(EA-00072-00)



● MOD.MERAK PLUS  
(EA-00052-00)



● MOD.MERAK PLUS  
(EA-00052-00)



● MOD.CLIC-2PASOS  
(SA-00104-00)



● MOD.SIDE BRACKET  
(EA-00076-00)



● MOD.SISTEMA MANUAL  
(EA-00007-00) + (EA-00056-00)



● MOD.RUEDA CADENA  
(EA-00056-00)



● MOD.CADENA  
(EA-00057-00)



● MOD.MANIVELA  
(EA-00058-00)

CÓDIGO	SKU	MODELO	DESCRIPCIÓN
EA-00017-KIT	600K	8M FAST-MERAK	OPERADOR LAT TAU FAST 8M 600K MERAK 220V



» OPERADOR LATERAL PARA CORTINA ENROLLABLE SIN RESORTES USO INTENSIVO RAPIDO HASTA 600 KILOS MARCA ELSAMEC MOD.TAURUS FAST 8M.

**Taurus 8M:** lifting capacity chart / tabella di sollevamento

transmission gear ratio **1:5** / rapporto di trasmissione **1:5**

	lifting capacity / capacità di sollevamento				tube rotation speed / velocità di avvolgimento tubo
	frequency / frequenza	output torque / coppia in uscita	gross / lorda	net / netta	
	Hz	Nm	Kg	Kg	RPM
Ø tube / tubo <b>133 x 4</b> mm	40	500	751	<b>600</b>	11,5
	50	400	601	<b>480</b>	14,4
	60	330	496	<b>396</b>	17,3
	75	260	390	<b>312</b>	21,8
Ø tube / tubo <b>159 x 4,5</b> mm	40	500	628	<b>502</b>	11,5
	50	400	503	<b>402</b>	14,4
	60	330	415	<b>332</b>	17,3
	75	260	327	<b>261</b>	21,8
Ø tube / tubo <b>168,3 x 4,5</b> mm	40	500	594	<b>475</b>	11,5
	50	400	475	<b>380</b>	14,4
	60	330	392	<b>314</b>	17,3
	75	260	309	<b>247</b>	21,8

transmission gear ratio **1:7** / rapporto di trasmissione **1:7**

	lifting capacity / capacità di sollevamento				tube rotation speed / velocità di avvolgimento tubo
	frequency / frequenza	output torque / coppia in uscita	gross / lorda	net / netta	
	Hz	Nm	Kg	Kg	RPM
Ø tube / tubo <b>133 x 4</b> mm	40	700	1052	<b>841</b>	8,2
	50	560	842	<b>673</b>	10,2
	60	465	699	<b>559</b>	12,4
	75	370	556	<b>444</b>	15,6
Ø tube / tubo <b>159 x 4,5</b> mm	40	700	880	<b>704</b>	8,2
	50	560	704	<b>563</b>	10,2
	60	465	585	<b>468</b>	12,4
	75	370	465	<b>372</b>	15,6
Ø tube / tubo <b>168,3 x 4,5</b> mm	40	700	832	<b>665</b>	8,2
	50	560	665	<b>532</b>	10,2
	60	465	552	<b>441</b>	12,4
	75	370	440	<b>352</b>	15,6



V11.20