


» OPERADOR LATERAL PARA CORTINA ENROLLABLE SIN RESORTES USO SEMI-INTENSIVO HASTA 260 KILOS MARCA ELSAMEC MOD.MINI TAURUS 5.4M.



● MOD.MINI TAURUS 5.4M
(EA-00006-00) + (EA-00064-00)



(EA-00006-00)

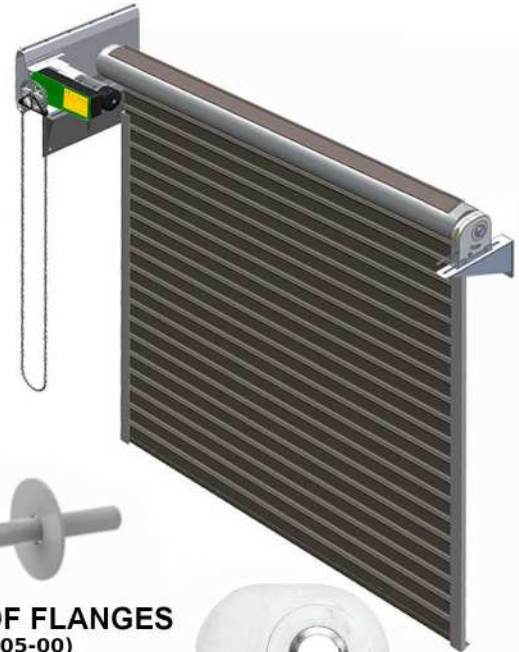

● MOD.AXLE
(EA-00068-00)



● MOD.PAIR OF FLANGES
(SI-00105-00)



● MOD.MX4CH-433
(MF-00003-00)



● MOD.MOTOR BRACKET
(EA-00064-00)



● MOD.STOP RING
(EA-00071-00)



● MOD.PRB 30
(EA-00075-00)



● MOD.SHUTTER 2.0
(MF-00014-00)



● MOD.CLIC-2PASOS
(SA-00104-00)



● MOD.INTERFACE MODULE
(EA-00051-00)



● MOD.SIDE PARA MOTOR
*(EA-00080-00)

● MOD.SIDE PARA MOTOR PRB
**(EA-00081-00)



● MOD.SISTEMA MANUAL
(EA-00006-00) + (EA-00056-00)



● MOD.RUEDA CADENA
(EA-00056-00)



● MOD.CADENA
(EA-00057-00)



● MOD.MANIVELA
(EA-00058-00)

CÓDIGO	SKU	MODELO	DESCRIPCIÓN
EA-00012-KIT	260K	5.4M-ACM1	OPERADOR LATERA TAUR MIN 260K ACM1 220V
EA-00016-KIT	260K	5.4M-SHUTTER 2TX	OPERADOR LATERA TAUR MIN 260K SHUT 220V



V11.20

» OPERADOR LATERAL PARA CORTINA ENROLLABLE SIN RESORTES USO SEMI-INTENSIVO HASTA 260 KILOS MARCA ELSAMEC MOD.MINI TAURUS 5.4M.

Mini Taurus 5,4M + Merak: Lifting capacity chart / tabella di sollevamento



lifting capacity / capacità di sollevamento

frequency / frequenza output torque / coppia in uscita gross / lorda net / netta tube rotation speed / velocità di avvolgimento tubo

Ø tube / tubo
101,6 x 2,6
mm

Hz	Nm	Kg	Kg	RPM
40	260	512	410	6,3
50	216	425	340	7,9
60	173	340	272	9,5
75	108	213	170	11,9

Ø tube / tubo
133 x 2,9
mm

40	260	391	313	6,3
50	216	325	260	7,9
60	173	260	208	9,5
75	108	162	130	11,9

Ø tube / tubo
159 x 3,2
mm

40	260	327	262	6,3
50	216	272	218	7,9
60	173	218	175	9,5
75	108	136	109	11,9

Ø tube / tubo
168,3 x 3,6
mm

40	260	309	247	6,3
50	216	257	206	7,9
60	173	206	165	9,5
75	108	128	102	11,9

