



Puertas & Portones Automáticos, S.A. de C.V.

¡Nuestra pasión es la Solución!....

»CIERRAPUERTAS HIDRAULICO (XL-A) DE SOBREPONER AJUSTABLE Y
REGULABLE MARCA ADS MOD.UL4400BC 1 - 6 (15 A 150KG).



**DOOR
CLOSER**



MANUAL DE INSTALACION



Versión Digital.

(229) 461-7028



portonesautomaticos@adsver.com.mx
portonesautomaticos@prodigy.net.mx



RESIDENCIAL



COMERCIAL



INDUSTRIAL



MEMBER
IDA
International Door Association



V08.21



(229) 927-5107, 167-8080, 167-8007, 151-7529.


www.adsver.com.mx

MANUAL DE INSTALACION


DOOR CLOSER

UL4400BC INSTALLATION INSTRUCTION


UL4400BC
STANDARD MOUNT
(PULL SIDE)

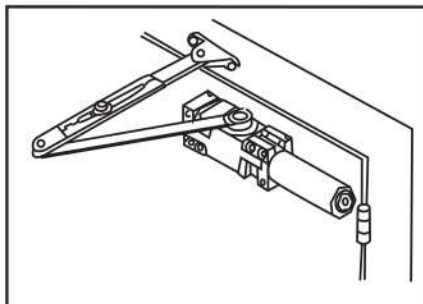

UL4400BC
TOP JAMB MOUNT
(PUSH SIDE)


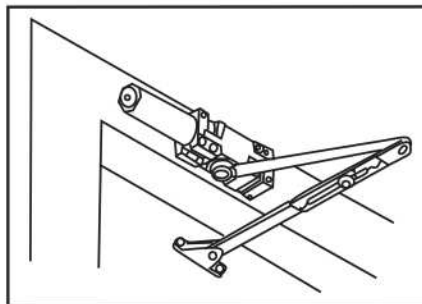


UL4400BC
PARALLEL MOUNT
(PUSH SIDE)

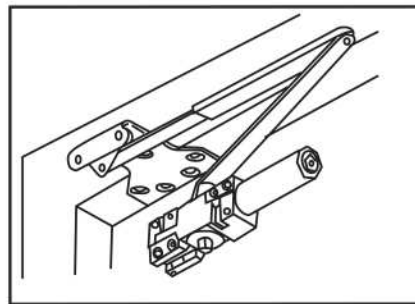

MAXIMUM DOOR WIDTH		FULL TURNS REQUIRED
EXTERIOR DOORS	INTERIOR DOORS	
—	5 lb-f*	5 TURNS C.C.W.
8.5 lb-f*	34" (864)	2 TURNS C.C.W.
30" (762)	38" (962)	0 TURNS
36" (914)	48" (1219)	5 TURNS C.W.
42" (1067)	54" (1372)	10 TURNS C.W.
48" (1219)	60" (1524)	15 TURNS C.W.


HOW TO DEFINE HAND OF DOOR

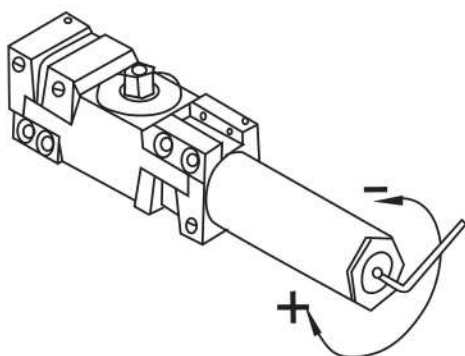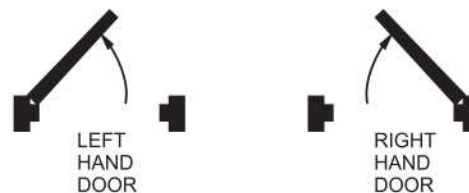

Spring Power
Adjustment

CONTROL RANGE

Back Check

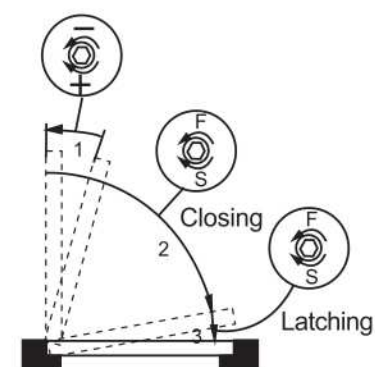


MANUAL DE INSTALACION

UL4400BC STANDARD INSTALLATION




Closer Mounted on Door on Pull Side (Left Hand)

This drawing shown is LEFT HAND DOOR, For RIGHT HAND DOOR should be installed in symmetry.

2 Holes for #14
All-Purpose or 1/4-20
(M6×1.0) Machine
Screws.

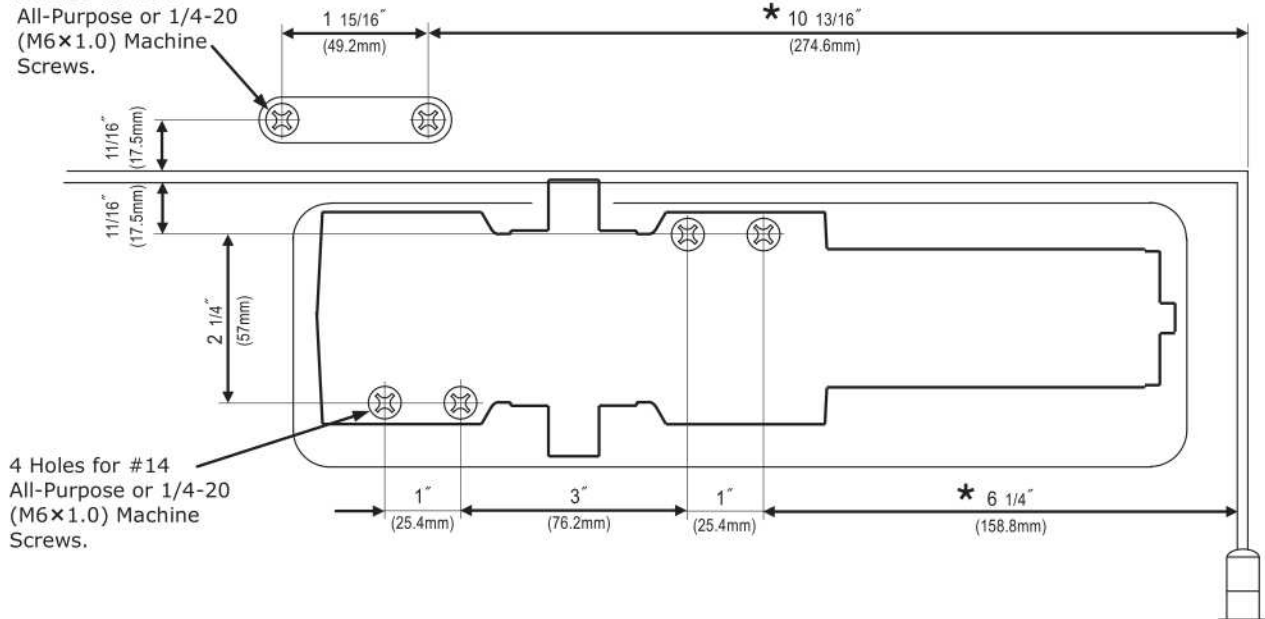

4 Holes for #14
All-Purpose or 1/4-20
(M6×1.0) Machine
Screws.

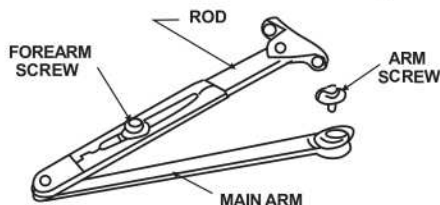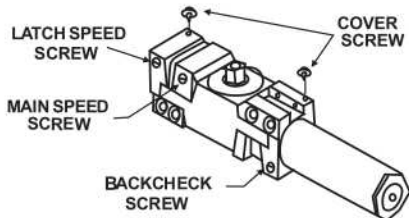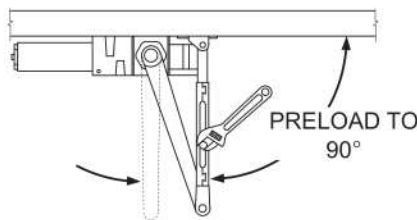

1. Adjust spring power to match door width as indicated by chart on page 1.
2. Mount on door as dimensions shown. Tube end toward hinge. If pivots are used, locate closer and shoe from CENTERLINE OF PIVOT.
(For offset pivots, pls increase the marked dimensions by 1/8")
3. Place main arm on top of shaft, 100° to closer body, insert arm screw into top of shaft and tighten.
4. Attach shoe to frame as shown. (if more latching power is required, rotate shoe 180°)
5. Open door and insert rod in forearm.
6. With forearm at right angle to door (90°), insert forearm set screw and tighten.
(IF HOLD OPEN ARM IS USED, THE NUT IS ON THE TOP FOR RH DOOR AND BOTTOM FOR LH DOOR)

REGULATION:

A 'Normal' closing time from 90° open position to door stop position is 4-8 secs, evenly divided between main swing speed and latch swing speed. Use socket key (furnished) to adjust speed. To slow main speed of door, turn regulating screw nearest shaft clockwise. To slow latch speed, turn regulating screw nearest latch clockwise.

BACK CHECK

To increase back-check force, turn regulating screw nearest hinge clockwise.
DO NOT USE ABRUPT BACKCHECK OR EXPECT DOOR CLOSER TO ACT AS A DOOR STOP.

COVER

Place insert in proper cutout, then push cover against door. Tighten both cover screw securely.

HOLD OPEN ADJUSTMENT (when hold open arm is used)




Loose adjusting nut, open door to desired hold open position and tighten nut.
Do not permit door to swing beyond hold open setting.

MANUAL DE INSTALACION

UL4400BC TOP JAMB INSTALLATION

Closer Mounted on Top Jamb on Pull Side (Right Hand)

This drawing shown is RIGHT HAND DOOR,
For LEFT HAND DOOR should be installed in symmetry.

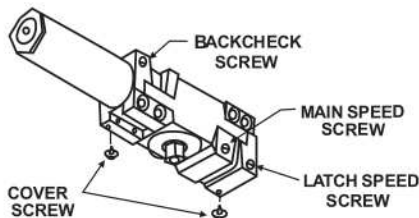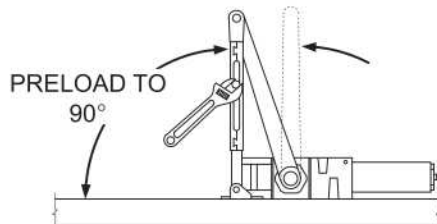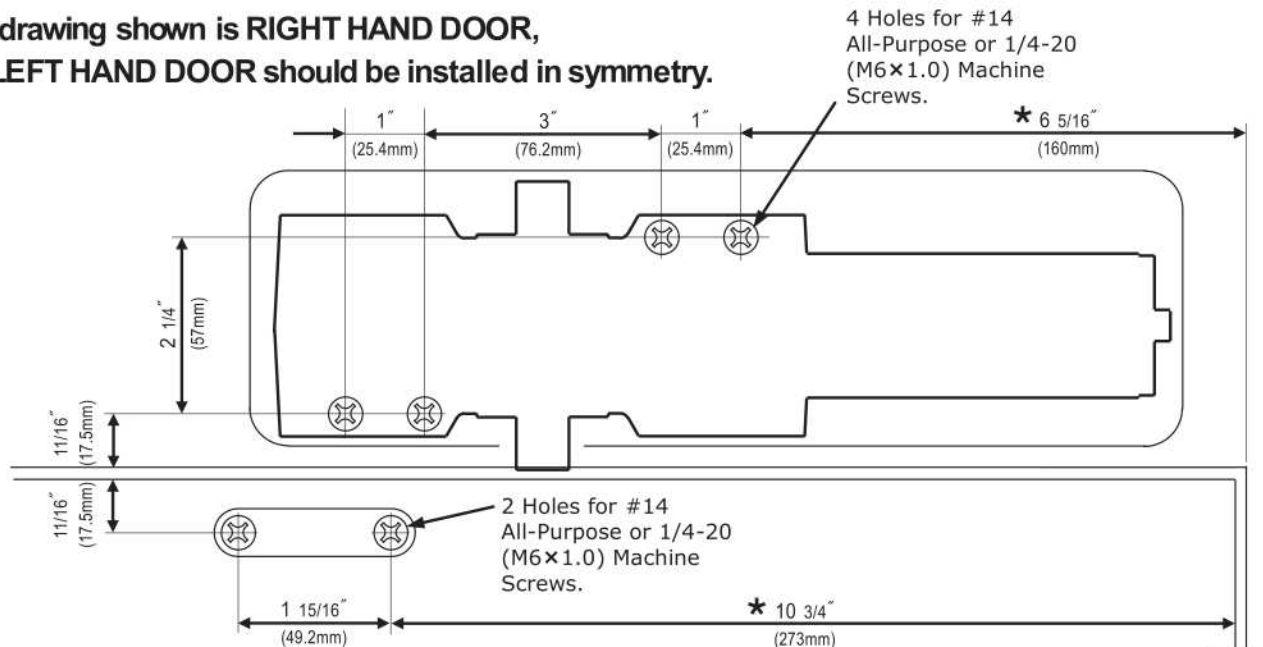

1. Adjust spring power to match door width as indicated by chart on page 1.
2. Mount closer on frame as dimension shown. Tube end toward hinge. If pivots are used, locate closer and shoe from CENTERLINE OF PIVOT. (For offset pivots, pls increase the marked dimensions by 1/8")
3. Place main arm on top of shaft, 100° to closer body, insert arm screw into top of shaft and tighten.
4. Attach shoe to door as shown. (if more latching power is required, rotate shoe 180°)
5. Open door and insert rod in forearm
6. With forearm at right angle to door (90°), insert forearm set screw and tighten. (IF HOLD OPEN ARM IS USED, THE NUT IS ON THE BOTTOM FOR RH DOOR AND TOP FOR LH DOOR)

REGULATION:

A 'Normal' closing time from 90° open position to door stop position is 4-8 secs, evenly divided between main swing speed and latch swing speed. Use socket key (furnished) to adjust speed. To slow main speed of door, turn regulating screw nearest shaft clockwise. To slow latch speed, turn regulating screw nearest latch clockwise.

BACK CHECK

To increase back-check force, turn regulating screw nearest hinge clockwise. DO NOT USE ABRUPT BACKCHECK OR EXPECT DOOR CLOSER TO ACT AS A DOOR STOP.

COVER

Place insert in proper cutout, then push cover against frame. Tighten both cover screw securely.



HOLD OPEN ADJUSTMENT (when hold open arm is used)

Loose adjusting nut, open door to desired hold open position and tighten nut. Do not permit door to swing beyond hold open setting.

MANUAL DE INSTALACION

UL4400BC PARALLEL ARM INSTALLATION CLOSER MOUNTED ON DOOR ON PUSH SIDE

This drawing shown is RIGHT HAND DOOR, For LEFT HAND DOOR should be installed in symmetry

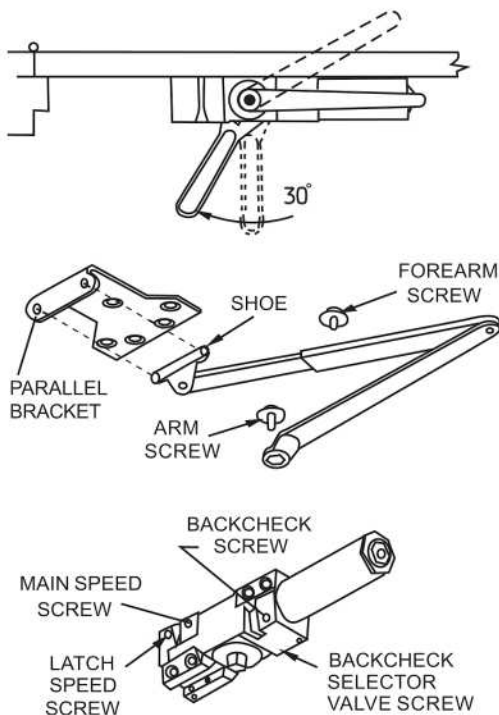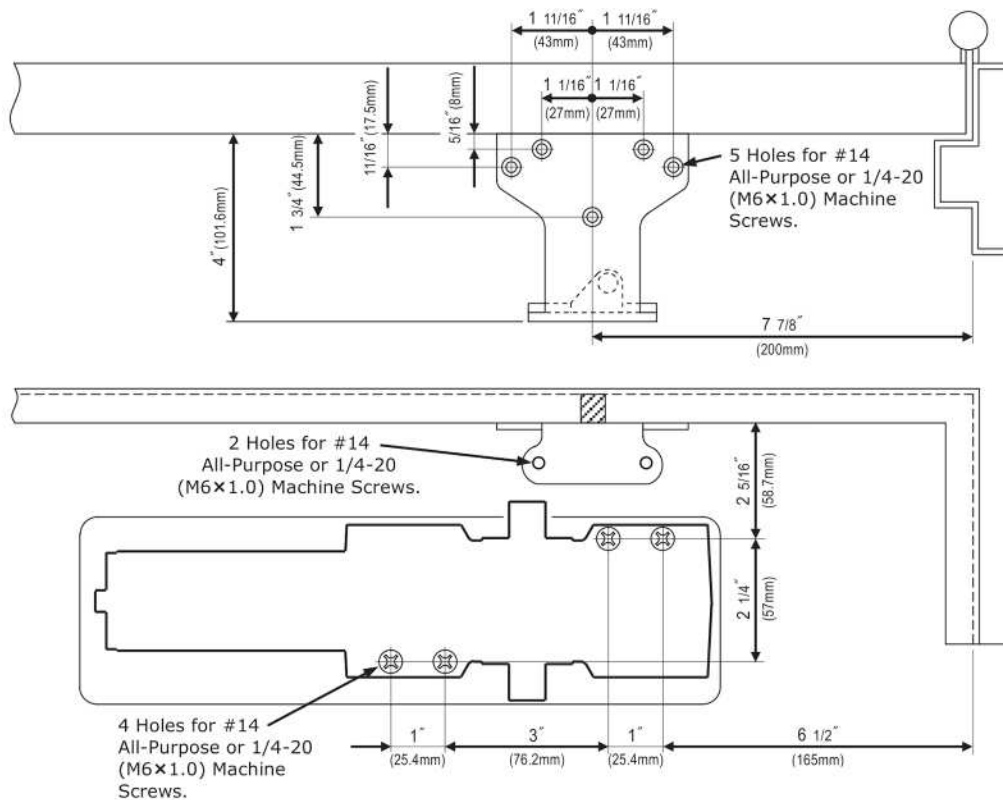

1. Before installation, turn Back Check selector valve (found on the opposite side of closer from back check screw side) ALL THE WAY IN (CLOCKWISE).
 2. Adjust spring power to match door width as indicated by chart on page 1.
 3. Mount closer on door as dimensions shown. Tube end toward latch. If pivots are used, locate closer and parallel bracket from CENTERLINE OF PIVOT.
 4. Place open end wrench on bottom shaft and turn toward hinge jamb about 30° and then place main arm on top shaft, insert arm screw into top of shaft and tighten.
 5. Attach parallel bracket on frame as dimensions shown.
 6. Attach rod and shoe to parallel bracket as shown.
 7. Insert rod in forearm, and then insert main arm to closer parallel to door. Then insert forearm set screw and tighten.
- (IF HOLD OPEN ARM IS USED, THE NUT IS ON THE TOP FOR RH DOOR AND BOTTOM FOR LH DOOR)

REGULATION:

A Normal closing time from 90° open position to door stop position is 4-8 secs, evenly divided between main swing speed and latch swing speed. Use socket key (furnished) to adjust speed. To slow main speed of door, turn regulating screw nearest shaft clockwise. To slow latch speed, turn regulating screw nearest hinge clockwise.

BACK CHECK

To increase back-check force, turn regulating screw nearest hinge clockwise. DO NOT USE ABRUPT BACKCHECK OR EXPECT DOOR CLOSER TO ACT AS A DOOR STOP.


COVER

Place insert in proper cutout, then push cover against frame. Tighten both cover screw securely.

HOLD OPEN ADJUSTMENT (when hold open arm is used)


Loose adjusting nut, open door to desired hold open position and tighten nut. Do not permit door to swing beyond hold open setting.

UL4400BC

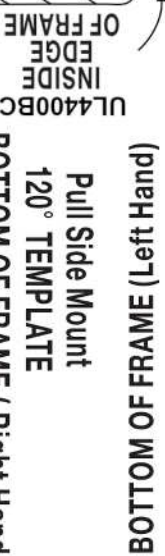


MANUAL DE INSTALACION

UL4400BC

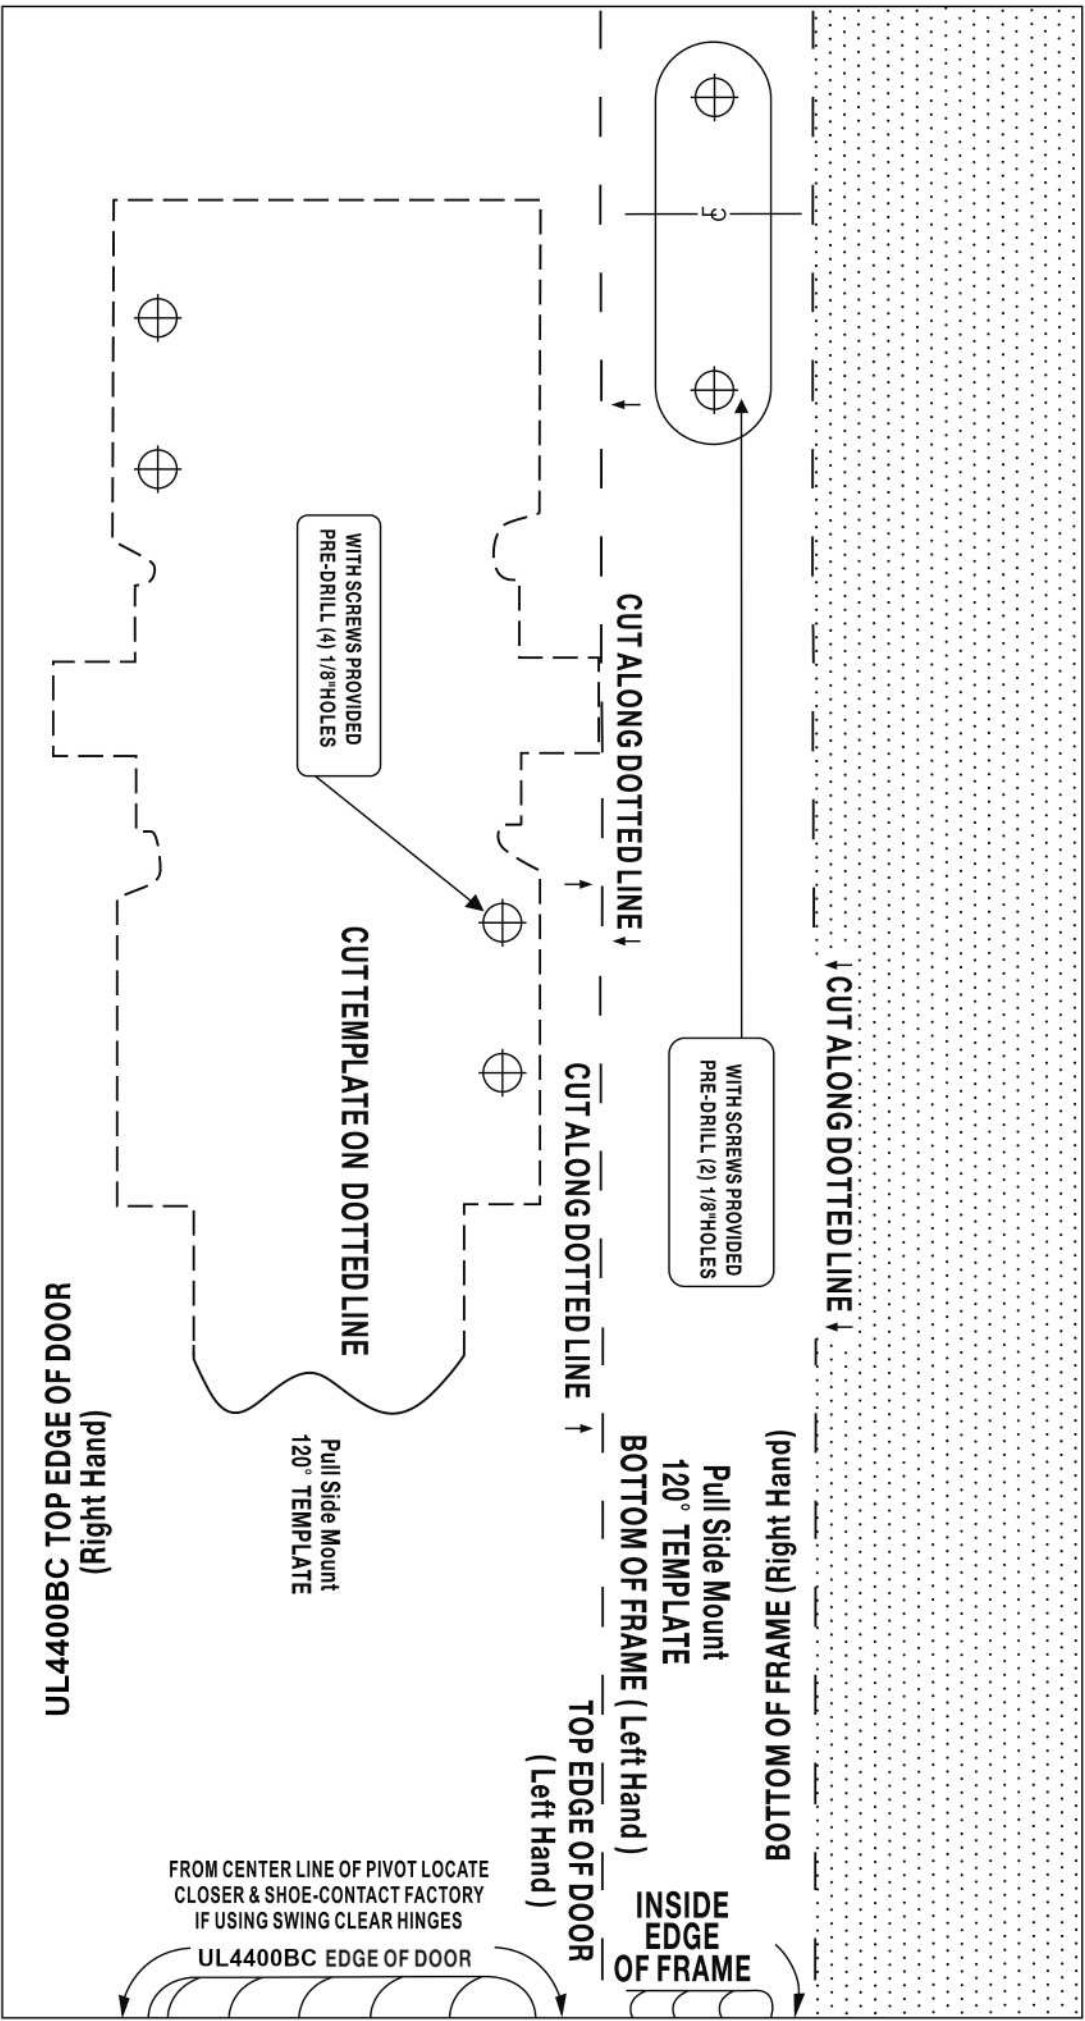



MANUAL DE INSTALACION

UL4400BC

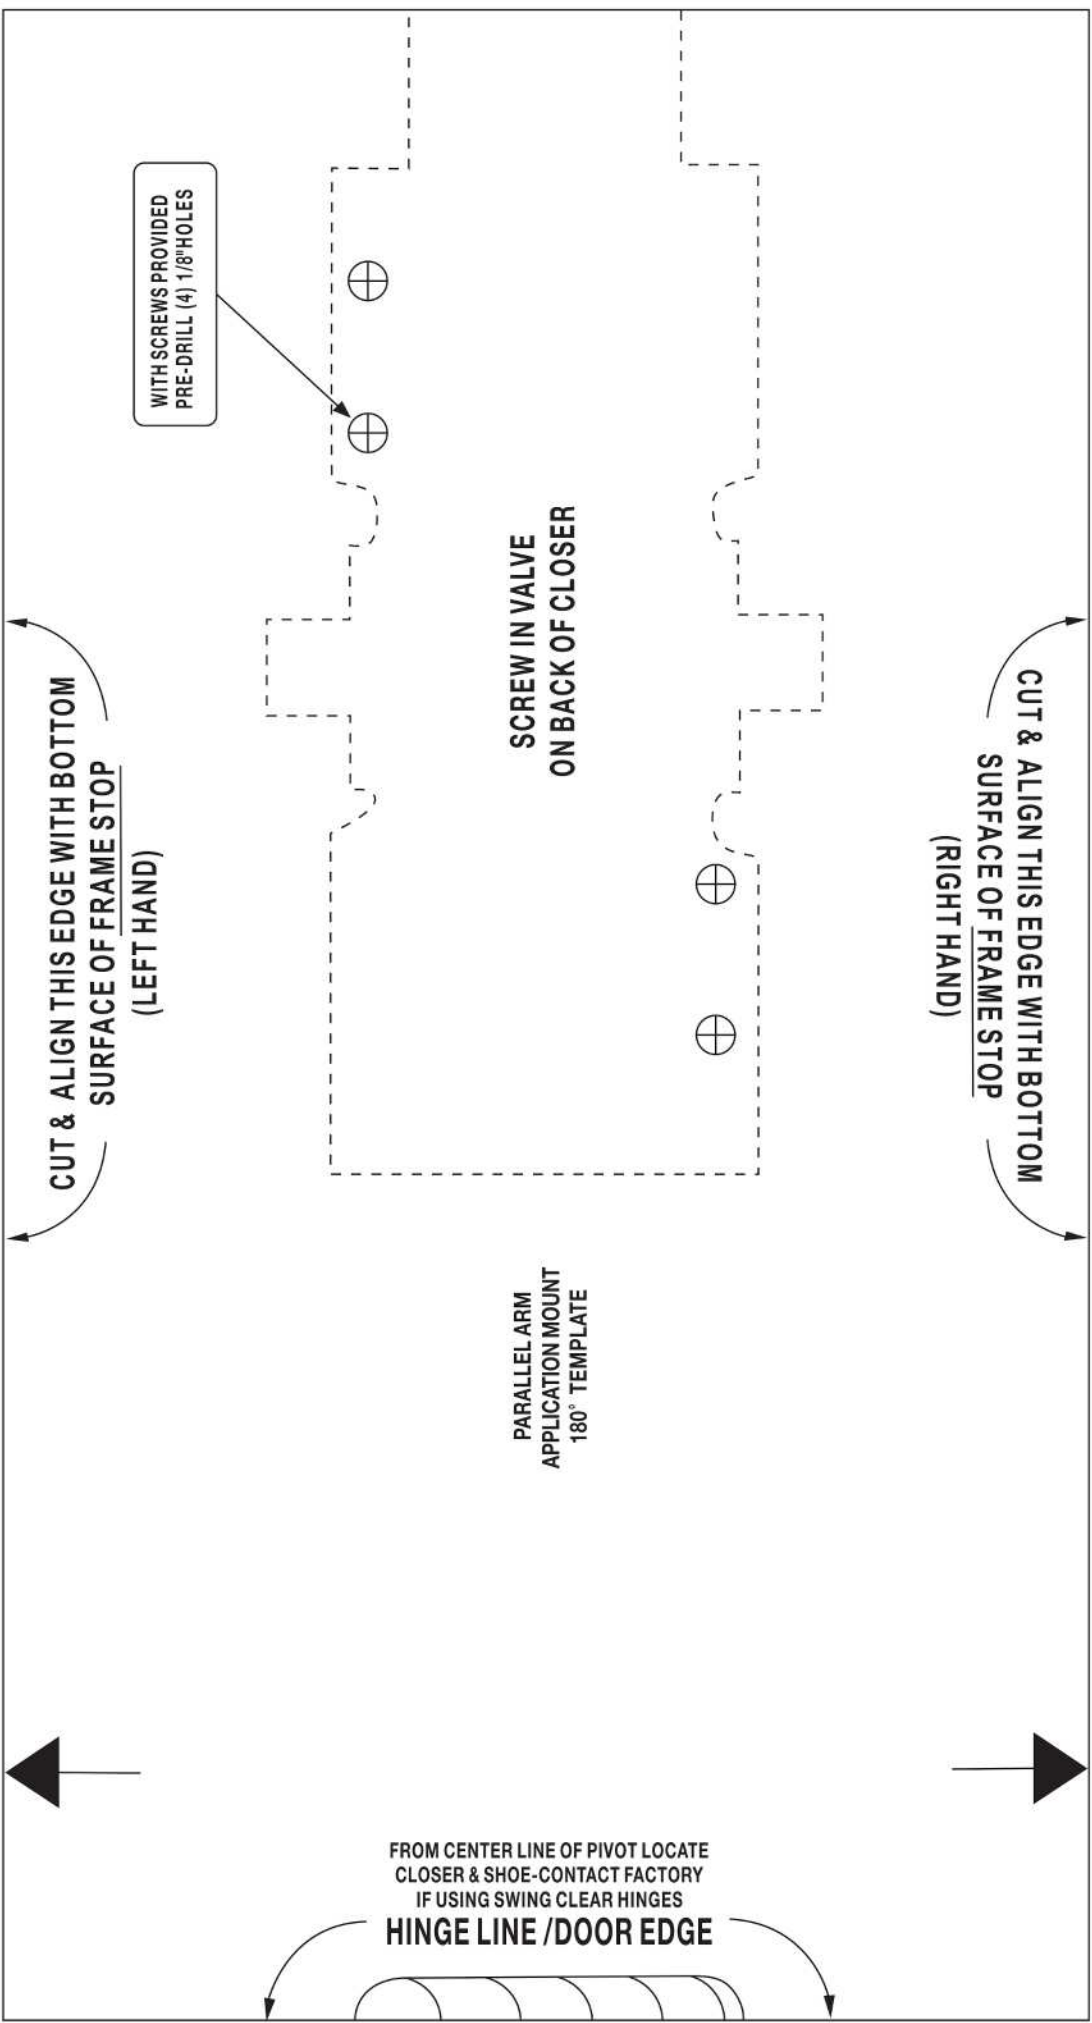

MANUAL DE INSTALACION


UL4400BC

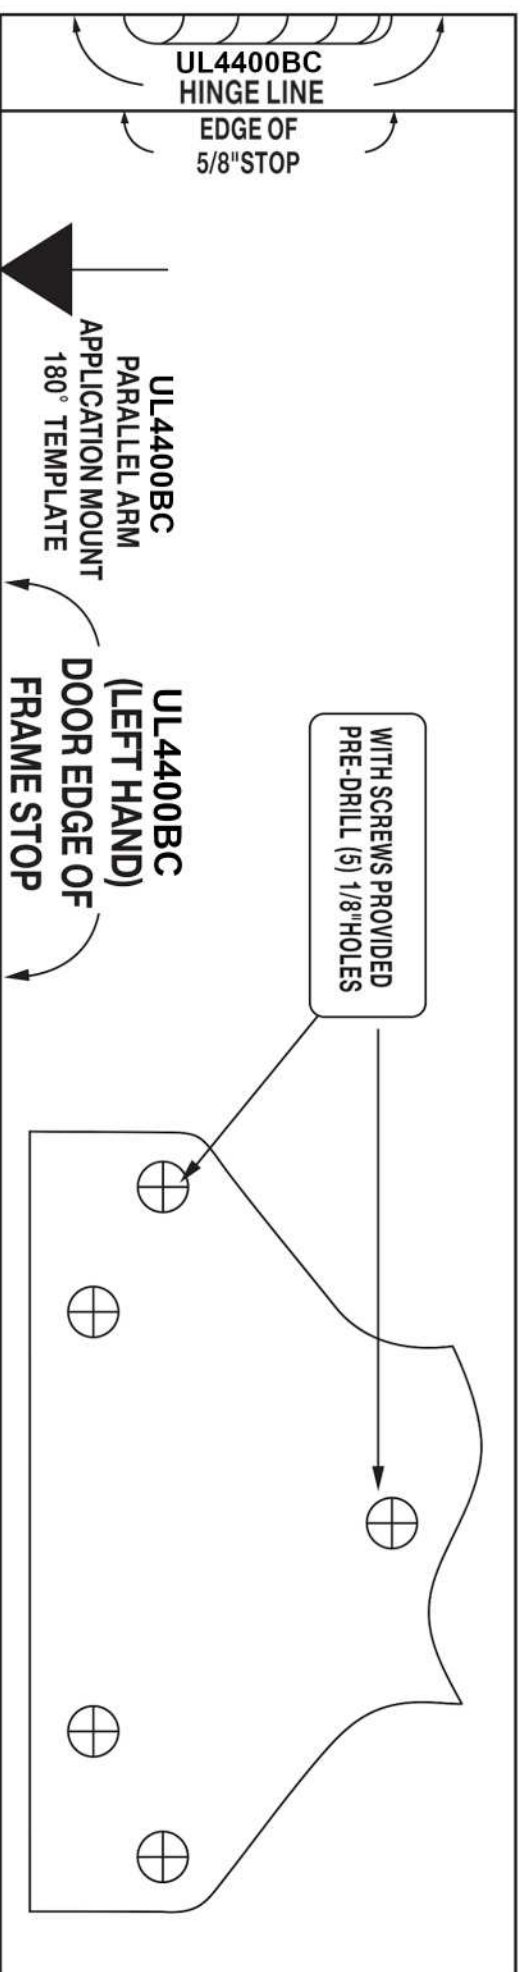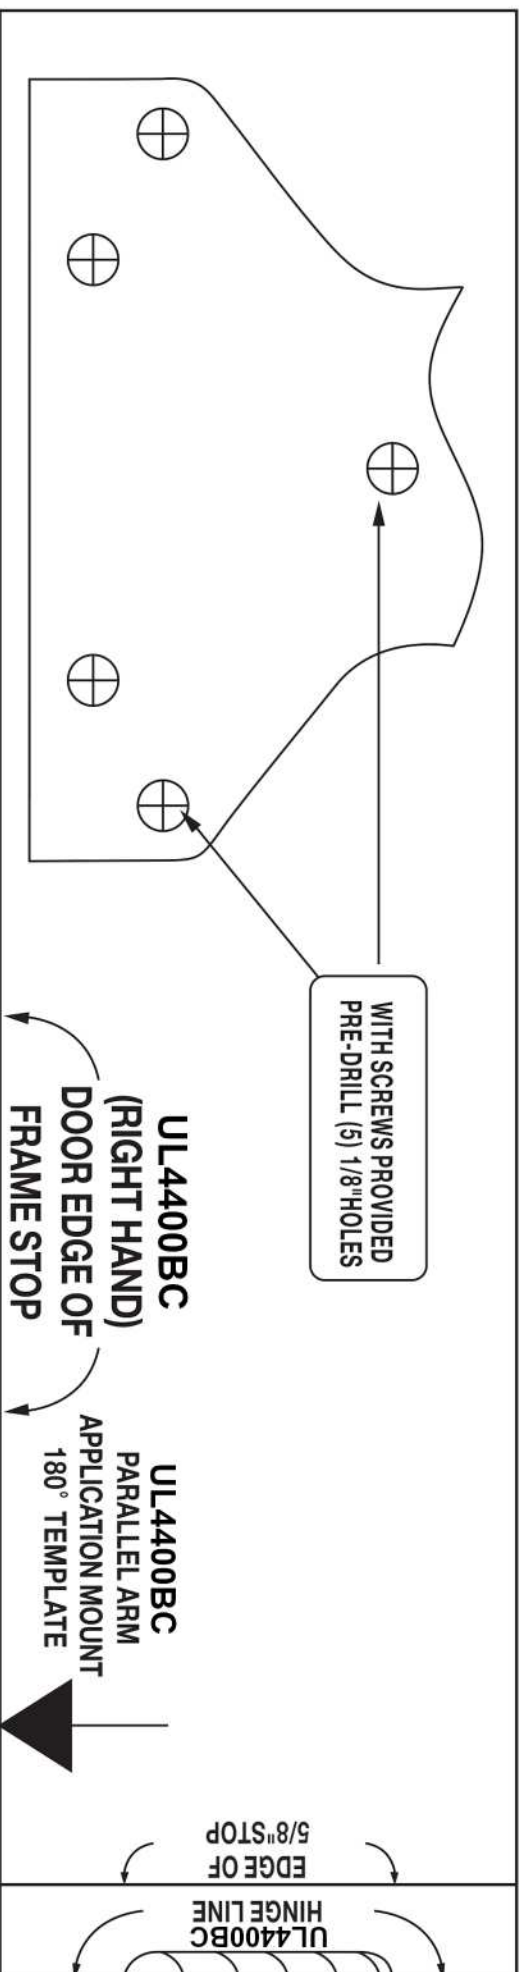



Puertas & Portones Automáticos, S.A. de C.V.

¡Nuestra pasión es la Solución!....

 (229) 461-7028

 portonesautomaticos@adsver.com.mx
portonesautomaticos@prodigy.net.mx



RESIDENCIAL



COMERCIAL



INDUSTRIAL



V08.21

(229) 927-5107, 167-8080, 167-8007, 151-7529.



www.adsver.com.mx