




»SENSOR DE INDUSTRIAL DE MOVIMIENTO + PRESENCIA SEGURIDAD MARCA OPTEX MOD. OAM-EXPLORER.

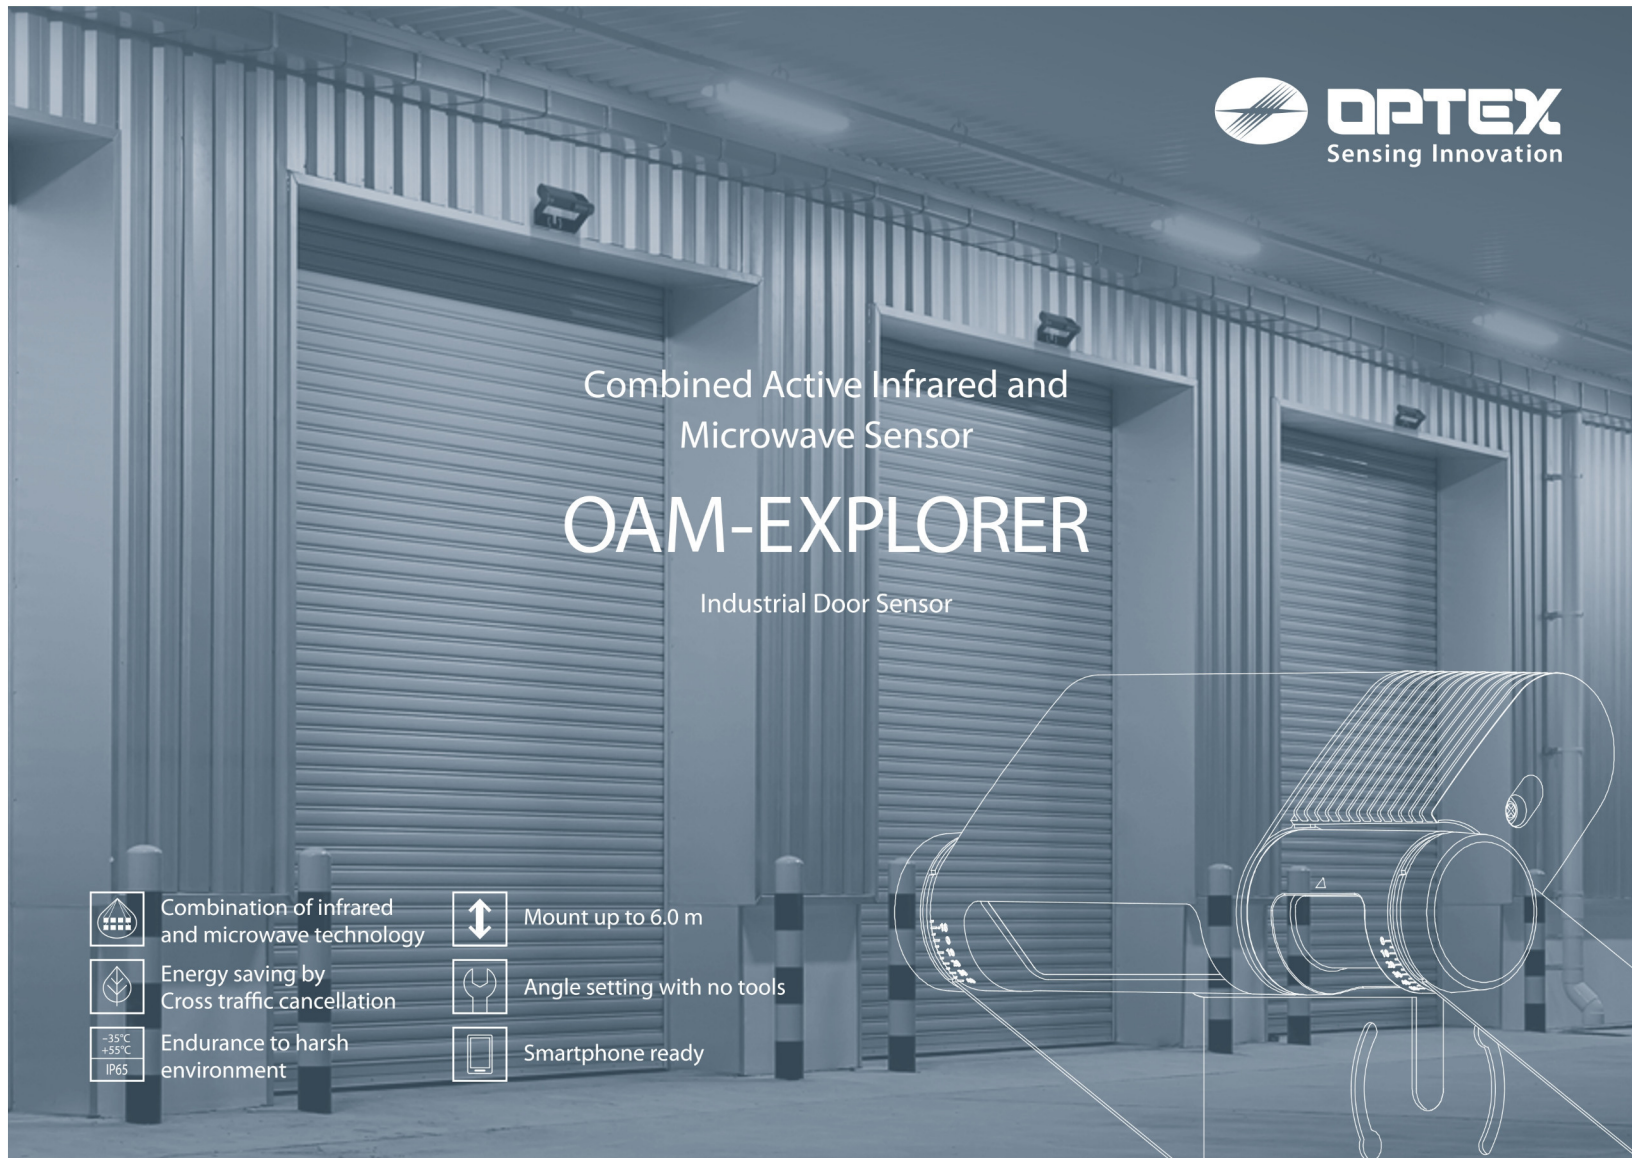


OPTEX
Sensing Innovation


Combined Active Infrared and
Microwave Sensor

OAM-EXPLORER


Industrial Door Sensor




Combination of infrared and microwave technology




Mount up to 6.0 m




Energy saving by Cross traffic cancellation



Angle setting with no tools



Endurance to harsh environment
-35°C
+55°C
IP65



Smartphone ready



»SENSOR DE INDUSTRIAL DE MOVIMIENTO + PRESENCIA SEGURIDAD MARCA OPTEX MOD. OAM-EXPLORER.



OPTEX's mission is to build a better future by using sensing technology to create a safe, secure and comfortable global society. Since producing the world's first infrared automatic door sensors, OPTEX has continued to create products that conform to global safety standards and contribute to a welcoming entrance space in any environment.

OPTEX optimizes the working environment by improving the safety and eco-efficiency of industrial doors used in factories and warehouses where forklifts and workers coexist, by applying the sensing technology cultivated in the global automatic door market.

OAM-EXPLORER

Proven technologies, trusted solutions



V12.21

»SENSOR DE INDUSTRIAL DE MOVIMIENTO + PRESENCIA SEGURIDAD MARCA OPTEX MOD. OAM-EXPLORER.

Industrial door sensor OAM-EXPLORER



High level of supplemental safety and flexibility





The OAM-EXPLORER is an infrared and microwave combination sensor designed for industrial door applications. By using the unique OPTEX presence detection technique, the OAM-EXPLORER provides both supplemental safety at the threshold of an industrial door and a large microwave activation detection area for forklifts and other vehicles.

The OAM-EXPLORER allows you to control external devices such as a strobe light or alert sounder for pre-caution purposes, helping avoid accidents between vehicles or pedestrians coming from the opposite side.

Avoid unwanted openings and contribute to the environment

The OAM-EXPLORER facilitates and secures the flow of vehicles including forklifts and trucks, and can also be programmed to sense and react to human traffic moving in and out of a building. Furthermore, the OAM-EXPLORER avoids unwanted door openings to contribute to increased efficiency of temperature management and room separation where hygiene is of concern.




Superior usability and work efficiency




The OAM-EXPLORER was designed with an eye for simplicity, having absolute attention to detail. For example, unique cabling and fastening that will minimize the total amount of time for installation and adjustment. Furthermore, the new manual design allows for smooth independent angle settings with no tools. As a result, the total time of installation and adjustment will be halved when compared to conventional industrial door sensors.

Once the OAM-EXPLORER is installed on the header or ceiling, further configuration and fine tuning are done via the free smartphone app. By registering your favorite settings you will be able easily load them into other sensors on site. This feature can be used in facilities that have multiple industrial doors, or in multiple different facilities where similarities exist. This saves setup time.



»SENSOR DE INDUSTRIAL DE MOVIMIENTO + PRESENCIA SEGURIDAD MARCA OPTEX MOD. OAM-EXPLORER.

Detection Area

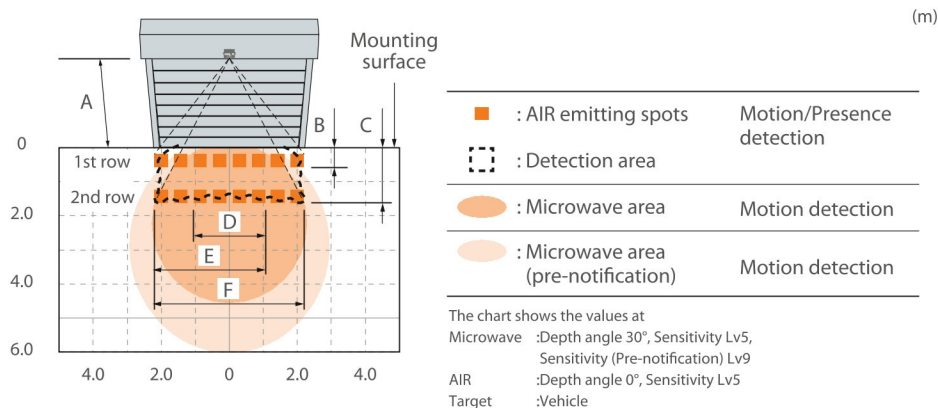


AIR emitting area

A	2.00	3.00	4.00	5.00	6.00
B	0.26	0.39	0.52	0.65	0.78
C	0.69	1.03	1.37	1.72	2.06
D	0.89	1.34	1.79	2.24	2.68
E	1.41	2.11	2.82	3.52	4.22
F	1.92	2.88	3.84	4.80	5.76

*The actual detection area may vary depending on the ambient light, color/material of the object or floor as well as the entry speed of the object.

Dimensions

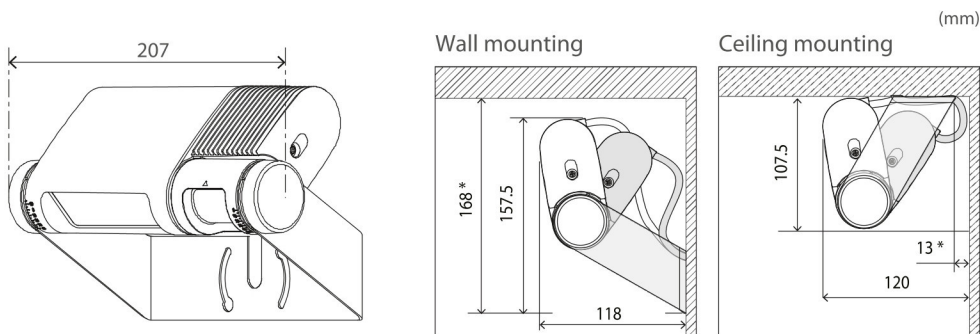

*This is the minimum dimension to prevent interference with the walls or ceilings.

Specifications

Model	OAM-EXPLORER EU
Color	Black
Mounting height	2.0m to 6.0m *1
Transmitter frequency	24.2GHz
Transmitter radiated power	< 12.7dBm
Detection area	See Detection Area
Detection method	Microwave Doppler effect Active infrared reflection *2
Depth angle adjustment	Microwave area : 0 to +50° AIR area : -15 to +40°
Power supply	12 to 24VAC±10%(50 / 60Hz) 12 to 30VDC ±10%
Power consumption	< 2.5W (< 3.5VA at AC)
Operation indicator	Green : Stand-by Blinking red : 1st row detection active Red : 2nd row detection active Orange : Microwave detection active
Output hold time	Approx. 0.5 sec. (Selectable via app)
Response time	< 0.3 sec. (Selectable via app)
Operating temperature	-35 to 55°C
Operating humidity	< 80%
Communication method	Bluetooth LE
Activation output	Form A relay 50V 0.3A Max. (Resistance load)
Supplemental safety output	Form B relay 50V 0.3A Max. (Resistance load)
AUX output *3	Form A relay 50V 0.3A Max. (Resistance load)
Environmental protection rating	IP65 / NEMA4
Weight	600g
Accessories	1 Operation manual , 2 Mounting screws 1 Mounting template , 1 Cable 10m

The specifications given herein are subject to change without prior notice due to improvements.

*1: A person can be detected at an installation height up to 4 m.

*2: Active infrared reflection has a presence detection function.

*3: The sensor can send an output to other devices such as a flashing light and alert sound.

