

»SEMAFORO NEGRO 2 LUCES LED 80Ø R-V IP56 24V MARCA STAGNOLI MOD.ERA80.

ERA80



MADE IN ITALY

CÓDIGO	SKU	MODELO	DESCRIPCIÓN
LS-00100-00	ASFERA80	ERA80	SEMAFORO NGO 2 LUC LED 80Ø R-V IP56 24V



V10.23

(229) 461-7028

portonesautomaticos@adsver.com.mx
 portonesautomaticos@prodigy.net.mx




»SEMAFORO NEGRO 2 LUCES LED 80Ø R-V IP56 24V MARCA STAGNOLI MOD.ERA80.

ERA80



A SUSTAINABLE ALLY

Our commitment towards the creation of sustainable products also includes the use of recycled materials in our production.

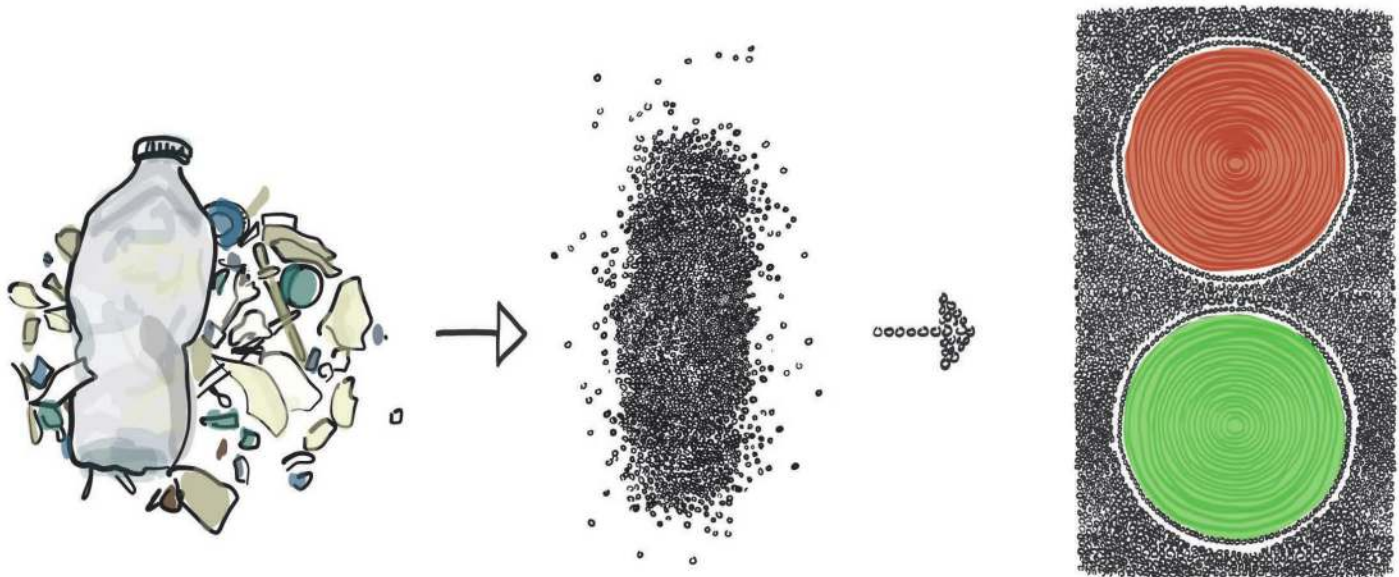

ERA 80 is a traffic light in post-consumer recycled plastic, the first of its kind in the world. Developed according to all principles of sustainable development: a lantern made in polyamide produced from industrial waste.

This traffic light is designed to meet high safety standards, with an attractive yet simple design.

It is a signaling product suitable for different contexts:


pedestrian crossings, parking lots, entrances in residential contexts.

ERA80 is not only a "design" product, but is most importantly a sustainable product, for meeting to the needs of a market getting increasingly sensitive to the issue of safety.



»SEMAFORO NEGRO 2 LUCES LED 80Ø R-V IP56 24V MARCA STAGNOLI MOD.ERA80.

Product details

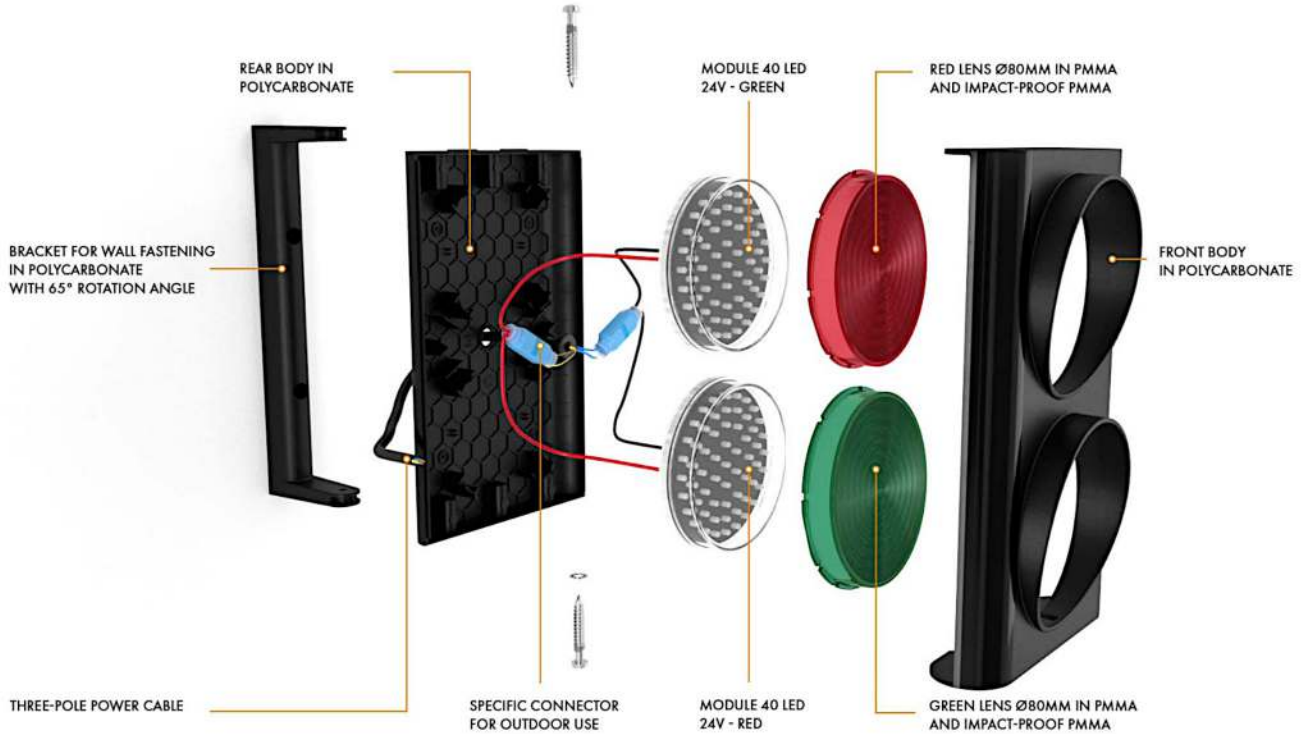

Easy to install


ERA80 makes the installation process simple thanks to its new fixing systems, with bracket and wall fixing

VERTICAL WITH BRACKET HORIZONTAL WITH BRACKET VERTICAL WITHOUT BRACKET HORIZONTAL WITHOUT BRACKET APPLICATION WITH POLE BRACKET




V10.23

»SEMAFORO NEGRO 2 LUCES LED 80Ø R-V IP56 24V MARCA STAGNOLI MOD.ERA80.
 Technical details

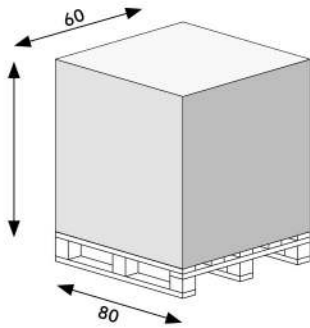

H120cm - pz.48

TECHNICAL DATA	ASFERA80 Traffic light set, 2 lights	ASFERA80D Directional vertical traffic light, 2 lights	ASFERA80O Horizontal traffic light, 2 lights	ASFERA80OD Directional horizontal traffic light, 2 lights
Power supply	24V	24V	24V	24V
Rated absorbed current	0,13A	0,13A	0,13A	0,13A
Power	1,50W	1,50W	1,50W	1,50W
Brightness	120lx (±10Lx)	120lx (±10Lx)	120lx (±10Lx)	120lx (±10Lx)
Working temperature	-20/+55°	-20/+55°	-20/+55°	-20/+55°
IP	56	56	56	56
Number of LEDs	40	40	40	40

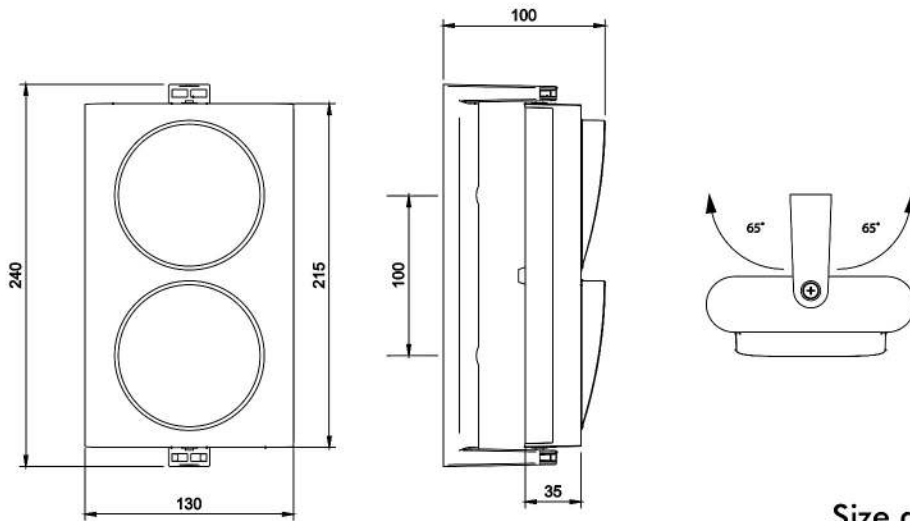

Size and bulk

Accessories



ASFERA80SP

Brackets for pole mounting



ASFERA80LD

Directional lenses kit



APS

Galvanized pole (60mm)

